

E075 : Three gang prism mould

STANDARDS: EN 12617-4, Comparable to: ASTM C438, NF P15-433

Used for the determination of linear shrinkage of cement mortar.

Manufactured from steel with hardness over 200 HV. All surfaces are grinded and all parts are marked with an identification number for a correct assembling.

A part-number is engraved on each mould and a Certificate of Conformity is supplied along with. Complete with 6 steel inserts and fixing screws.

Weight: 8.6 Kg approx

Spares :

E075-01 Contact points with screws



E075

Accessories :


E075-10 Spacers

E075-11 Inserts

E107 Three gang prism mould, NF - DIN

E107-01 Contact points

E113 Three gang prism mould, NF P18-427

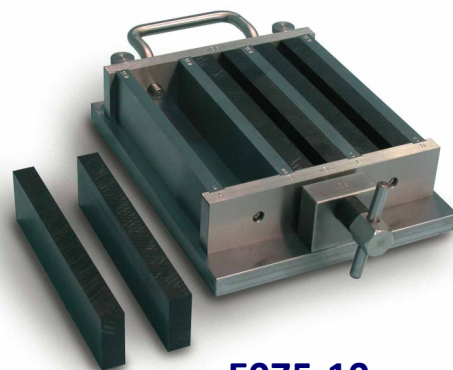

E075-10

BAG-MacBen BV
Oostjachtpark 12,
B-9100 Sint-Niklaas

T: +32 3 771 48 04 info@macben.eu
www.macben.eu

BAG-MacBen
Smederijstraat 2,
NL-4814 DB Breda

T: +31 765 30 23 73 sales@macben.eu
www.macben.eu